

COMET S

Overview of options

Whether fix mounting, tube mounting or magnetic fixing - the various versions of the LED beacon COMET S offer a solution for every requirement. Our COMET S has an impressively extra flat and modern design. Maximum light intensity (Class II homologation) and a fully lighted lamp dome ensure the best possible visibility and warning effect.



Fix mounting




Magnetic fixing



Tube mounting

Fix mounting

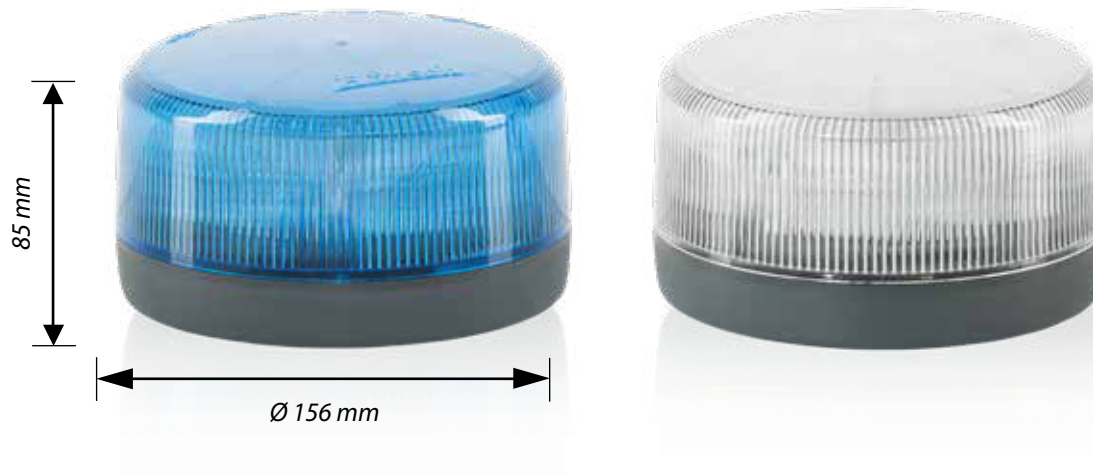

Also available with examination in accordance with ICAO type C. Further information can be found on page 93.

PRODUCT FEATURES:

- fix mounting in accordance with DIN 14620, form B1
- various homologated flash patterns integrated
- two rows of LEDs provide full-area illumination
- class II homologation
- options:
 - day/night switching (via cable)
 - day/night switching (automatic)
 - convoy function
 - function monitoring (high)
 - analogue or CAN447 version
 - also available with clear lamp dome
 - soft light signal (night) possible
- colours: also available in amber, red and green

<i>Technical data:</i>	
Designation:	COMET S
Voltage:	9-32 V multi voltage
Flash frequency:	> 2 Hz
Average power consumption:	12 V: 1.3 A / 24 V: 0.7 A
Material:	lamp dome: PC / socket: ASA
Type of protection:	IP5K4K / IPX9K
<i>Homologation: (Germany and international)</i>	
Light according to ECE-R 65:	TB2 (E1) 00 4425
EMC according to ECE-R 10:	(E1) 10R-05 7965

COMET S

Magnetic fixing



PRODUCT FEATURES:

- with spiral cable and triple magnetic fixing
- optimum adhesion even on slightly curved vehicle roofs
- rubber-coated magnets to protect paintwork from scratches
- tested at up to 250 km/h
- choice of different plugs
- various homologated flash patterns integrated
- two rows of LEDs provide full-area illumination
- options:
 - day/night switching (via CAN447-cable)
 - day/night switching (automatic)
 - analogue or CAN447 version
 - also available with clear lamp dome
 - soft light signal (night) possible
- colours: also available in amber and red

Tube mounting



PRODUCT FEATURES:

- for fitting on a mounting tube in accordance with DIN 14620
- impact-resistant housing base
- various homologated flash patterns integrated
- two rows of LEDs provide full-area illumination
- options:
 - day/night switching (automatic)
 - flexible (AF) or fixed (A) tube
 - also available with clear lamp dome
 - soft light signal (night) possible
- colours: also available in amber and red

**Also available with examination in accordance with ICAO type C.
Further information can be found on page 93.**